



SUMITOMO ELECTRIC INDUSTRIES, LTD.

00.05.10


P0400862H

800MHz band

Power Amplifier Module

◆ **Features**

- Low voltage operation of 5 V with negative voltage of -3 V
- 810 - 885 MHz frequency band
- Typical P1dB of 26 dBm
- Excellent adjacent channel leakage power of -58 dBc (50 kHz offset) at 22 dBm output with low power consumption of typical 1.6 W
- Typical 30 dB power gain
- Cost-effective metal package
- Low thermal resistance structure

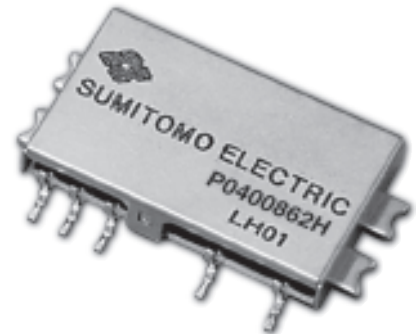

◆ **Applications**

- Power Amplifier for use in driver stage of PDC base station systems

◆ **Description**

The P0400862H is a power amplifier module which achieves an excellent adjacent leakage power at the output power of 22 dBm at an 800MHz band, housed in a cost effective metal package. It features a low voltage operation of 5 V. This power amplifier can be used for a driver stage of the PDC base station systems. The P0400862H is designed to achieve the output power of 22 dBm with the adjacent channel leakage power (P_{adj}) of -45 dBc at 25 kHz offset, with the P_{adj} of -58 dBc at 50 kHz offset, and with the P_{adj} of -68 dBc at 100 kHz offset, dissipating as low as typical 1.6 W. It operates with 5 V and -3 V power supplies.

◆ **Absolute Maximum Ratings**

Case Temperature Tc=30 °C

Parameter	Symbol	Value	Units
DC Supply Voltage	Vd	6 *	V
	Vg	- 6	V
Input Power	Pin	0	dBm
Storage Temperature	Tstg	-40 to + 85	°C
Operating Case Temperature	Topt	-20 to + 85	°C

Notes: Operating of this device above any one of these parameters may cause permanent damage.



*Vg=-3 V

◆ **Electrical Specifications**


Case Temperature Tc=30 °C

Parameter	Symbol	Test Conditions	Value			Units
			Min.	Typ.	Max.	
Frequency	f		810	—	885	MHz
Supply Current (under operation)	Id	Pout=22 dBm Vd1=Vd2=5V Vg1=-3 V	—	320	350	mA
Gate Current	Ig		—	—	4	mA
Power Gain	Ga		27	30	33	dB
Input VSWR	—		—	1.8	3.0	—
Harmonic Distortion	2f0		—	-40	-30	dBc
	3f0		—	-50	-30	dBc
Adjacent Channel Leakage Power	ACPR	25 KHz offset	—	-47	-45	dBc
	Padj 1	50 KHz offset	—	-60	-58	dBc
	Padj 2	100 KHz offset	—	-70	-68	dBc


◆ Power Characteristics

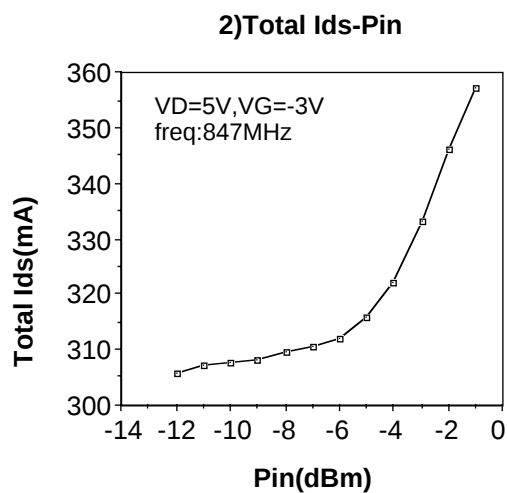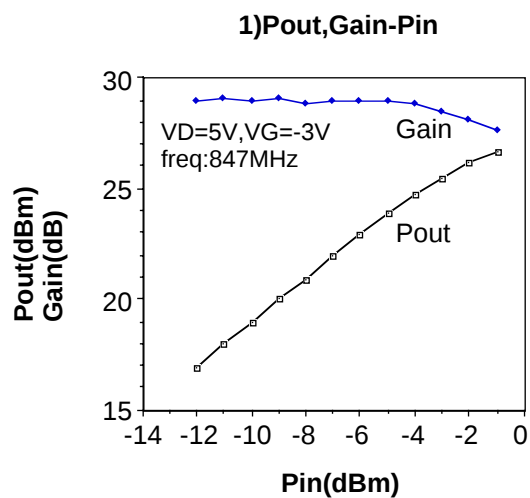


◆ Harmonic Distortion

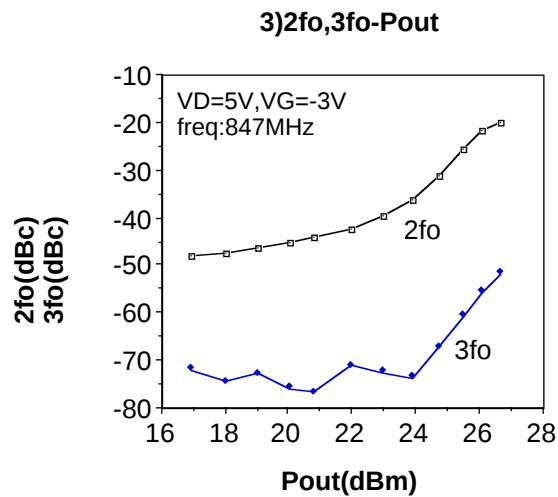

◆ Adjacent Channel Leakage Power

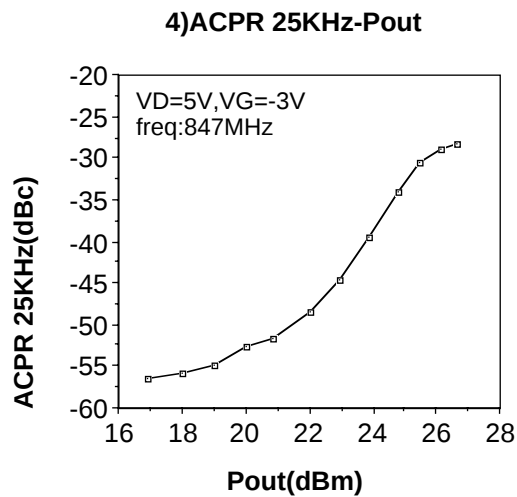

◆ **Package Drawing (Dimensions are mm)**

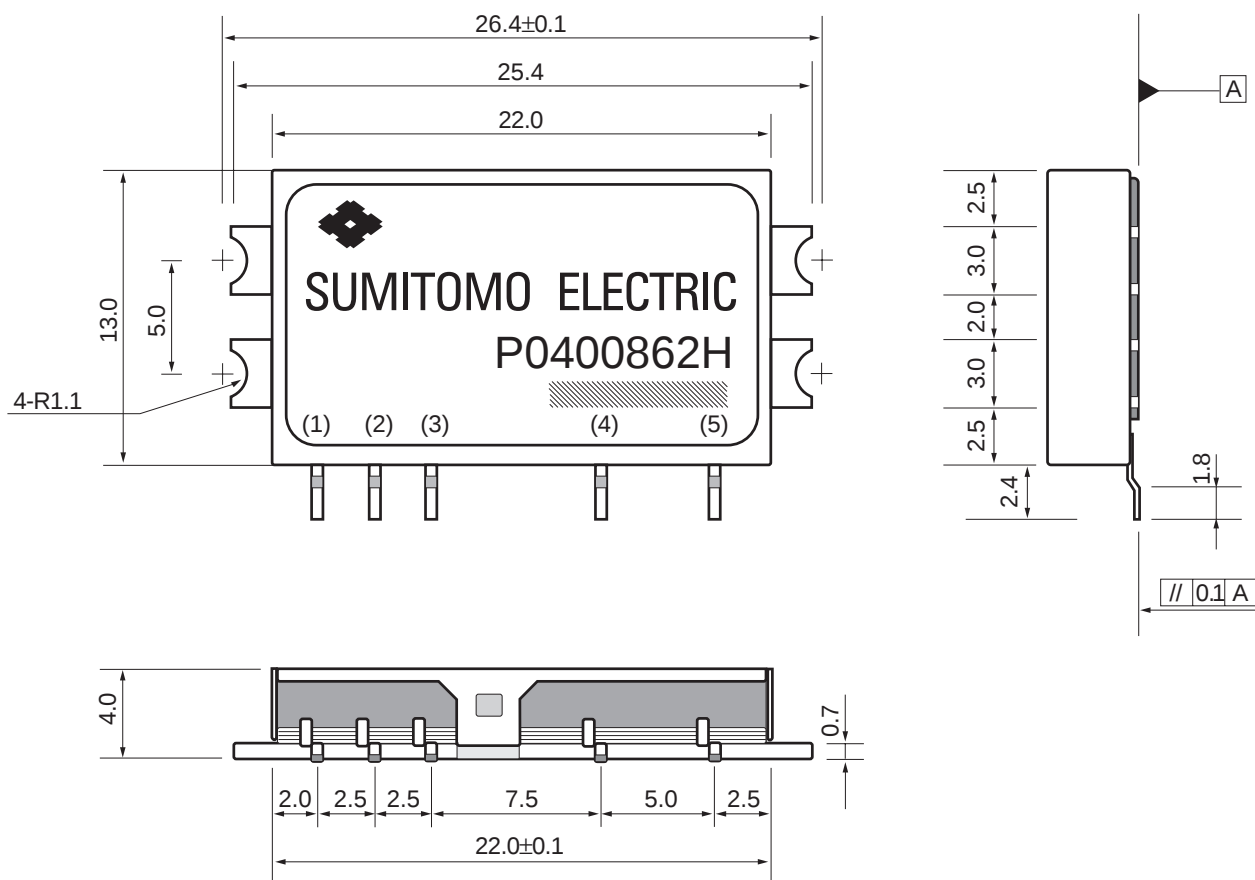

Lead Size : 0.25×0.5

 : Lot No.

Dimensions are mm (± 0.3 mm)




Nominal Variation of Lead Pitch : ± 0.3

Nominal Variation of parts undescribed : ± 0.3

◆ **Pin Assignment**

(1) RFin	(2) Vg1	(3) Vd1
(4) Vd2	(5) RFout	Case: GND

◆ Evaluation Board Layout (Dimensions are mm)

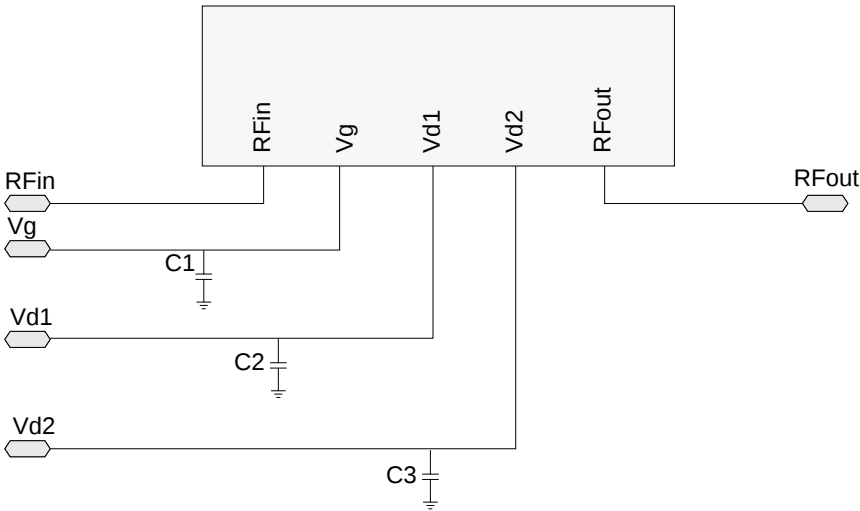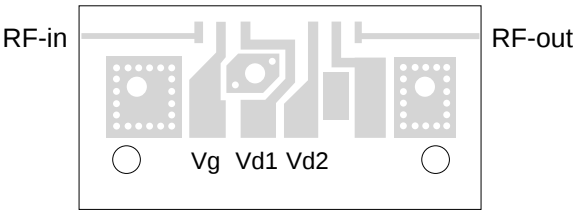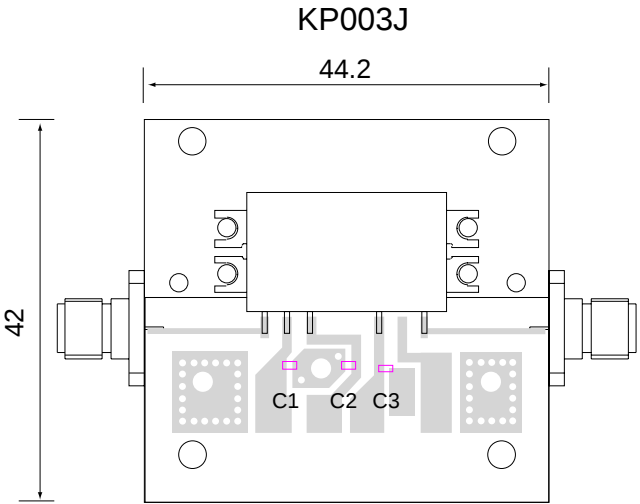

DESIGNATION	VALUE
C1	0.1μF
C2,C3	1.0μF