



SUMITOMO ELECTRIC INDUSTRIES, LTD.

Preliminary

00.01.28

P0621971H

1.9 GHz band

Power Amplifier Module

◆ **Features**

- 1900 - 2020 MHz frequency band
- Typical P1dB of 31 dBm
- Excellent IM3 of -58 dBc at 15 dBm output with low power consumption of 7 W
- Typical 30 dB power gain
- Power supplies of 10 V and -5 V
- Cost-effective metal package



◆ **Applications**

- Power Amplifier for use in base station systems of N-CDMA

◆ **Description**

The P0621971H is a power amplifier module which achieves an excellent IM3 of -58 dBc at the output power of 12 dBm (S.C.L.) with a typical 30 dB gain at an 1.9GHz band, housed in a cost effective metal package. This power amplifier for base systems of N-CDMA is required a low 3rd order distortion because of amplifying several carriers at the same time. The P0621971H is designed to achieve the total output power of 15 dBm at IM3 of -58 dBc with a low power consumption of 7 W. It operates with 10 V and -5 V power supplies.

◆ **Absolute Maximum Ratings**Case Temperature T_c=35 °C

Parameter	Symbol	Value	Units
DC Supply Voltage	V _d	11 *	V
	V _g	- 6	V
Input Power	P _{in}	5	dBm
Storage Temperature	T _{stg}	-40 to + 85	°C
Operating Case Temperature	T _{opt}	-20 to + 80	°C


Notes: Operating of this device above any one of these parameters may cause permanent damage.

*V_{g1} ,V_{g2}=-5 V◆ **Electrical Specifications**Case Temperature T_c=35 °C

Parameter	Symbol	Test Conditions	Value			Units
			Min.	Typ.	Max.	
Frequency	f		1900	—	2020	MHz
Supply Current (under operation)	I _d	P _{out} =12 dBm* Δf = 60 MHz V _d =10 V V _g =-5 V	—	700	900	mA
Gate Current	I _g		—	—	10	mA
Power Gain	G _a		27	30	33	dB
Input VSWR	—		—	—	3 : 0	—
Harmonic Distortion	2f ₀		—	—	-40	dBc
	3f ₀		—	—	-50	dBc
Third Order Intermodulation Ratio	I _{M3}		—	-58	-55	dBc

* Single Carrier Level

◆ **Package Drawing (Dimensions are mm)**

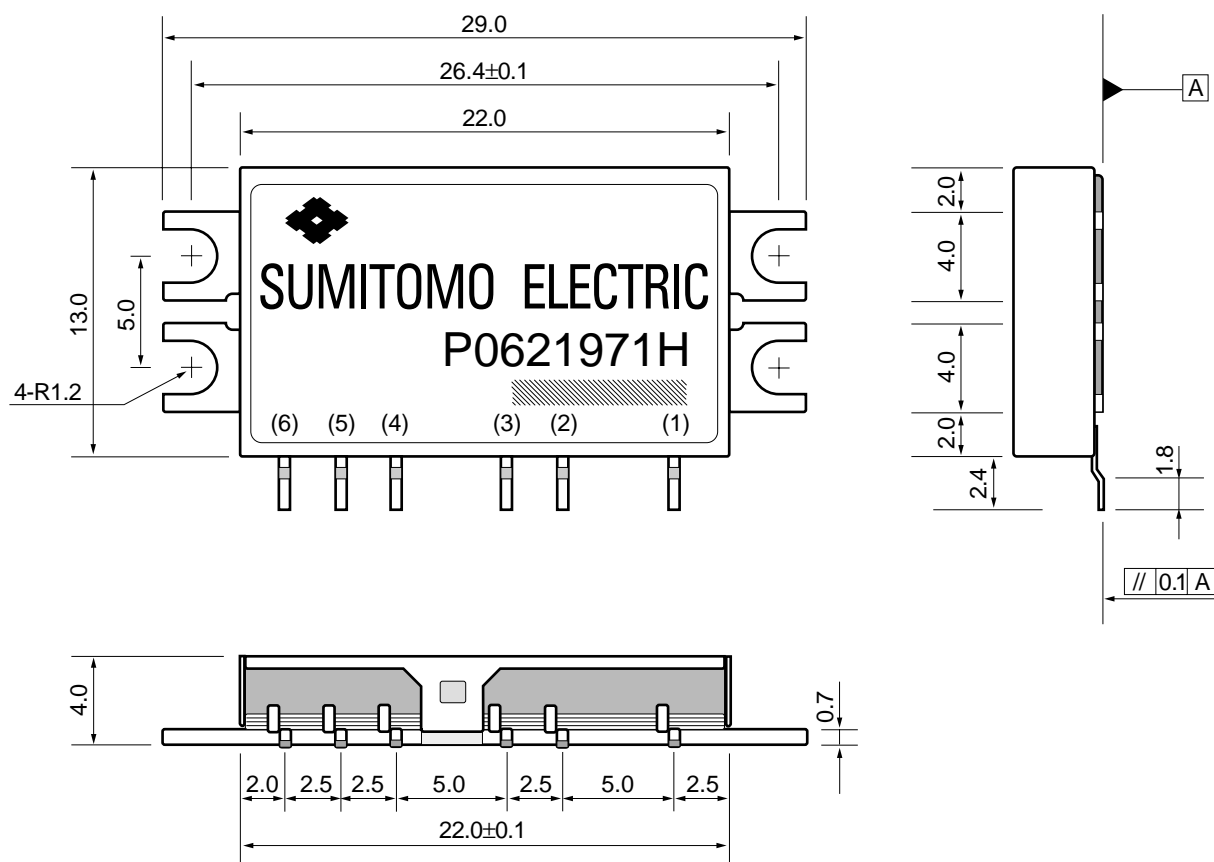

Lead Size : 0.25×0.5

▨ : Lot No.

Dimensions are mm (±0.3mm)

Nominal Variation of Lead Pitch : ±0.3

Nominal Variation of parts undescribed : ±0.3

◆ **Pin Assignment**

(1) RFin	(2) Vg1	(3) Vd1	Case: GND
(4) Vg2	(5) Vd2	(6) RFout	

◆ *Evaluation Board Layout (Dimensions are mm)*

